

NEW PRODUCTS



JOLLY®

Introduction

Guangzhou Hongcai Stage Equipment Co.Ltd was established in 2006, is a collection of technological research and development, production, sales and after-sales service of modern professional stage lighting manufacturers.

Since its foundation, with its strong technology and perfect of service system, engaged in the brand of "JOLLY", dedicated to development, production and sales of stage lights products, including moving head, LED lighting, energy saving LED wash, and outdoor lighting etc. of varieties kinds of entertainment equipments. Based on the excellence of quality, stable of performance and perfect of technology service, Jolly Lighting has been widely used in different kind of entertainment field, also obtained good reputation both from the competitor and professor of this industry. In 2009, Jolly won the certificate of quality products from Chinese Entertainment Equipment Industry, and in 2016, Jolly won the high and new technology enterprise certificate.

Jolly light has the team of persisting the aim of quality seeking survival, perfect service making development, innovation insuring efficiency, and culture wining the market, with the dedicated of R&D technicians, high quality of products supply, perfect of technology support, and first-class of after-sales service to get the market, insisting details, making perfect of enterprise spirit to service society , which makes we and our user more and more closely together, created one and another miracles, with quality of products and perfect of service to return society.



X-7 Coupe












Static gobo



Roating gobo




Effect wheel

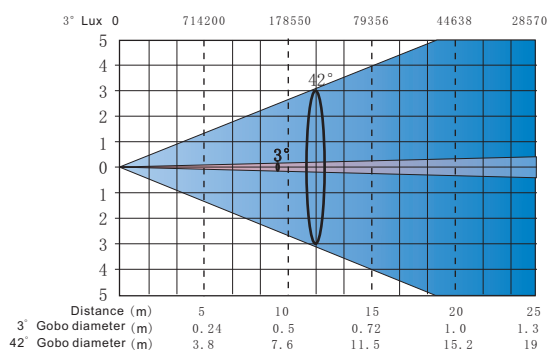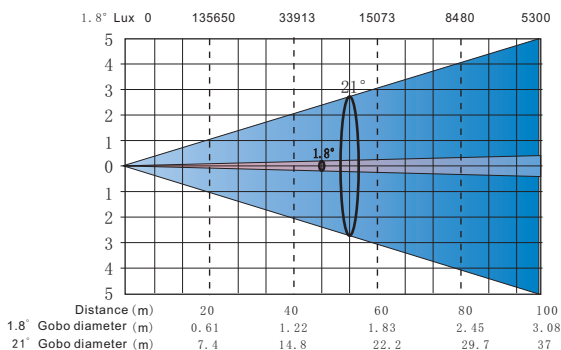








Performance

- Lamp : OSRAM SIRIUS HRI 470 W
- Color temperature : 7500K
- Power : AC:100-240V/50-60Hz , 650W
- Channel : 39/34 channels
- ZOOM : beam mode 1.8-21° , spot mode 3-42°
- Gobo size : OD 15.8mm ID 12.2mm
- CRI: 80 or 90
- Pan 540° 3.8S Tilt 270° 2.1S
- Colorwheel : 13 color + open
- Static gobowheel : 14 gobo + open
- Rotating gobowheel : 9 gobo + open
- Animation wheel : speed adjustable
- CMY : CMY effect
- Prism : 2 8facet, 2 6 facet, 1 32facet , 1 concave lens
- Frost : linear frost
- Focus : auto focus
- Zoom : linear zoom
- Strobe : 1-12/S
- Dimmer : linear dimmer
- Display : 2.8 touch screen
- Upgrade : firmware upgrade with DMX cable
- Battery: display with battery inside
- Size L 418mm W 247mm H 688mm
- Weight : N.W. 25kgs
- IP 20

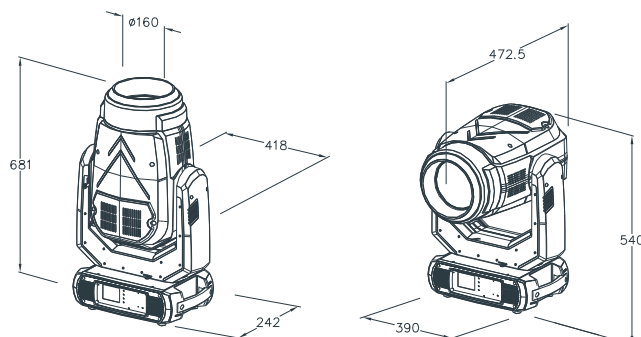





Static gobo

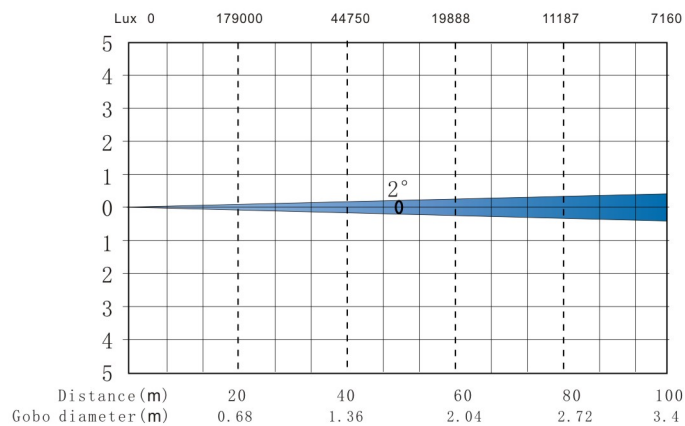

Performance










- Lamp: Osram Sirius HRI 420WS
- Lens: 200Φ
- Color temperature: 6500K
- Power: 100-240V, 50/60Hz, 600W
- Channel: 16/21 ch
- Colorwheel: 14+open
- Static gobowheel: 15+open
- Prism: 8 facet + 24 facet
- Frost: linear frost
- Beam angle: 2°
- Focus: linear focus
- Strobe: 12/S
- Dimmer: linear dimmer
- Size: L 372mm, W 313mm, H 630mm
- Weight: 23kgs
- Ip54



X-6 Beam IP




Static gobo

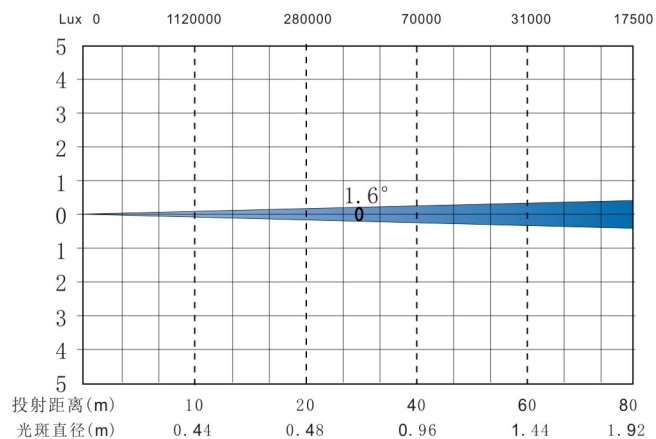

Performance

- Lamp: Osram Sirius HRI 520W
- Lens: 200mm
- Color temperature: 7500K
- Power: AC: 100-240V/50-60Hz , 700W
- Channel : 21/15 channels
- Colorwheel : 14 color + open
- Static gobowheel : 17 gobo + open
- CMY : CMY effect
- Prism : 8 facet , 24 facet
- Frost : linear frost
- Focus : auto focus
- Strobe : 1-12/S
- Dimmer : linear dimmer
- Pan 540° Tilt 270°
- Display: 2.0"
- RDM: yes
- Upgrade : firmware upgrade with DMX cable
- Battery: display with battery inside
- Beam angle : 1.6°
- Lens : 200mm
- Size : L374.8mm W262.8mm H638.5mm
- Weight : N.W. 27kgs
- Noise : 35-55db
- IP66








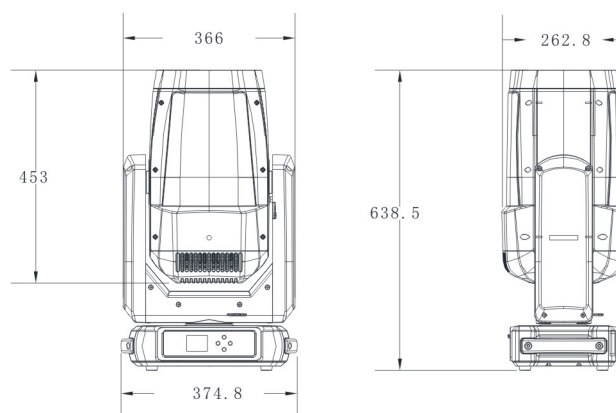




Static gobo




Rotating gobo

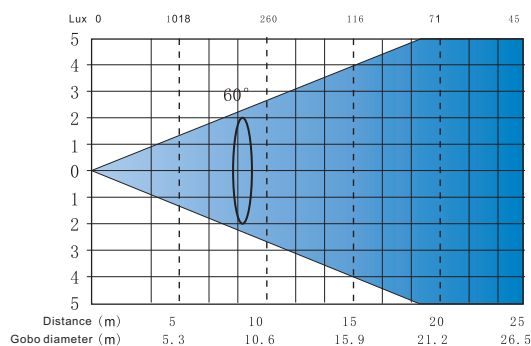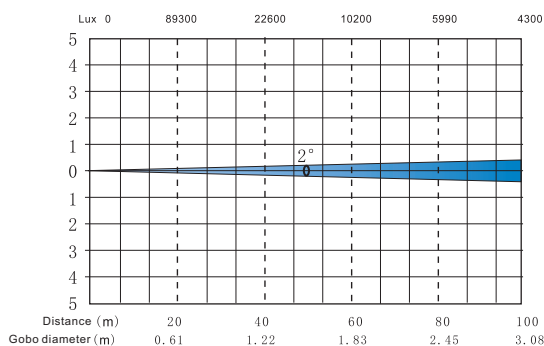


Performance

- Zoom : 2-60° Φ 140mm front lens
- Gobo size : OD 15.9mm ID : 10mm
- Lamp : Osram Sirius HRI® 371WS
- Color temperature : 7800K
- Power : AC:100-240V 50/60Hz 600W
- Channel : 24/24/16 ch
- X/Y : 3 phase motor,X/Y 8/16Bit,
- Speed : X 540°/ 2.7s Y 260°/ 1.45s
- Color wheel : 13+open
- Static gobowheel : 14+open
- Rotating gobowheel : 9+open
- Prism:8 facet prism
- Frost : linear frost
- Focus : linear focus, auto-focus
- Zoom : linear zoom
- Shutter : 0.5-12/s
- Dimmer : linear dimmer
- Display : 2.8" touch screen
- Control : DMX512, RDM
- Software upgrate : yes
- Battery : yes
- XLR : 3 pin/ 5 pin
- Size : L390.5mm W286.5mm H599mm
- Weight : N.W(kg) : 22 G.W(kg) : 28
- Thermal cut:yes
- IP : IP20
- CE : Yes



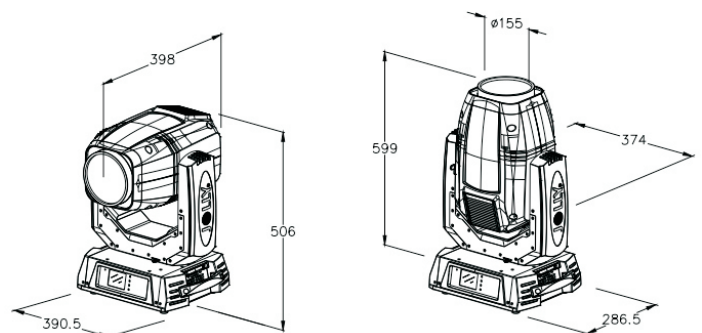


Performance

- Beam angle : 2°
- Lamp : Osram Sirius HRI 371S 7800K
- Power : AC:100-240V 50/60Hz 600 W
- Channel : 19/12
- Speed : Pan 540° 2.7S Tilt 270° 1.45S
- Colorwheel : 13 color + open
- Static gobowheel : 14 gobo + open
- Prism : 8facet + 24facet
- Frost : linear frost
- Focus : auto focus
- Strobe : 1-12/S
- Dimmer : linear dimmer
- Display : touch screen
- Battery: display with battery inside
- Size : L 391mm W 287mm H 579mm
- Weight : N.W.21kgs G.W.27kgs

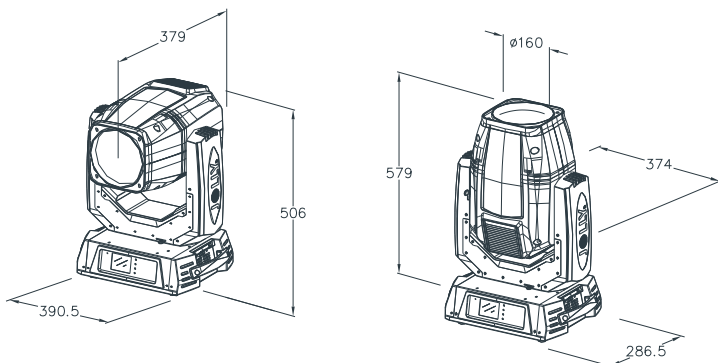





Static gobo

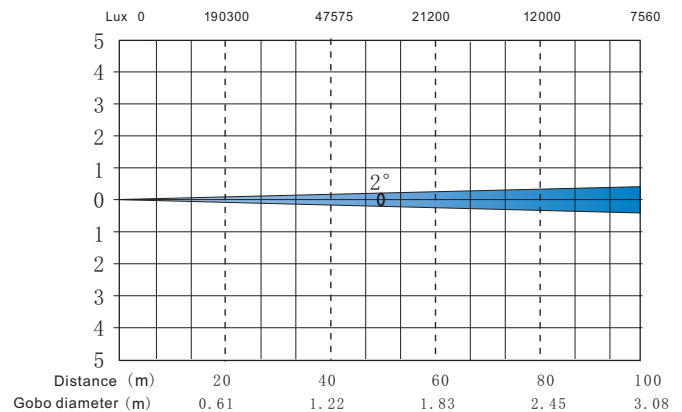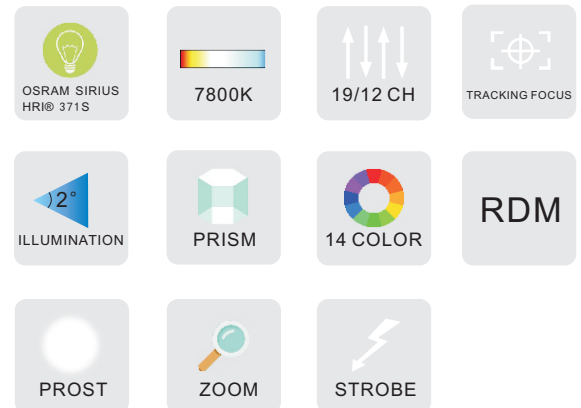

XL-3 Beam IP




Static gobo

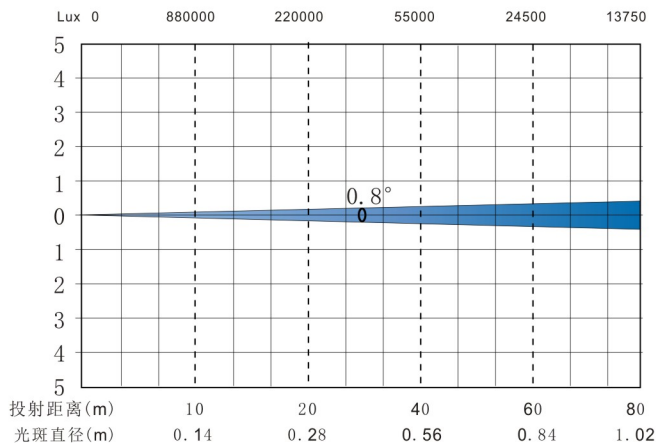





Performance

- Lamp: 300W white laser
- Color temperature: 8000K
- Lens : 200mm
- Beam angle : 0.8°
- Power: AC: 100-240V/50-60Hz 500W
- Channel : 21/30 channels
- Colorwheel : 17 color + open
- Static gobowheel : 19 gobo + open
- CMY : CMY effect
- Prism : 8 facet 32facet
- Frost : linear frost
- Focus : auto focus
- Strobe : 1-25/S
- Dimmer : linear dimmer
- Pan 540° Tilt 270°
- Display : 2.0"
- RDM : yes
- Upgrade : firmware upgrade with DMX cable
- Battery : display with battery inside
- Size : L 403mm W 283mm H 690mm
- Weight : N.W. 27kgs :
- Noise : 35-55db
- LP66


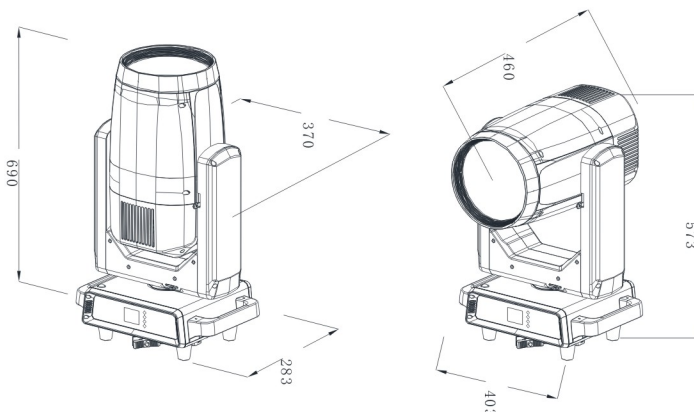


Performance

- Zoom:4°-60°
- Lamp:37*30W LED RGBW
- Color Temperature:6500K
- Power:100-240V 50-60Hz 1500W
- Channel: A:21/35/132/146/169 B:21/35
- Internet Control:Art-net
- Colorwheel:RGBW
- Lens: Rotation lens
- Focus:Linear focus
- Strobe:1-25/S
- Dimmer:Linear focus
- Display:2.8"touch screen
- Battery: display with battery inside
- Upgrade: firmware upgrade with DMX cable
- Size:L463.5mm W365mm H586mm
- Weight:N.W.23KGS
- Working Temperature:Max45°

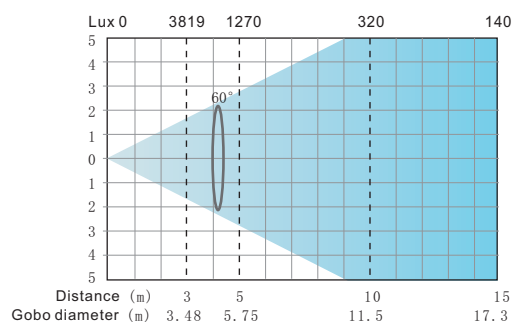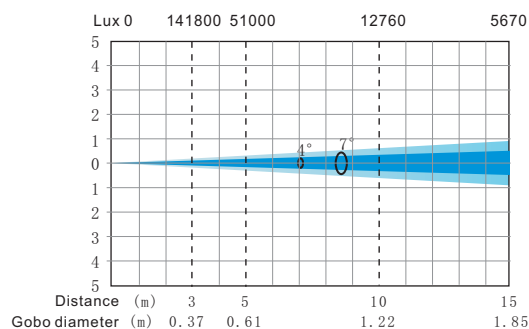
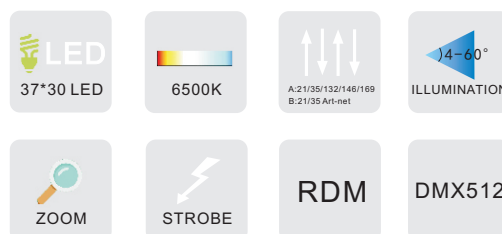
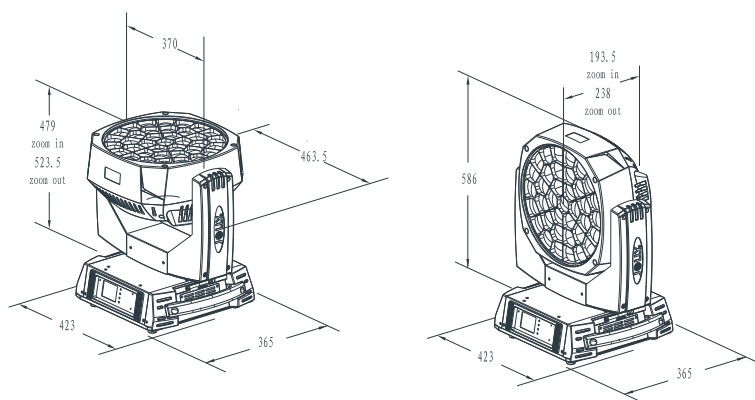


Q-4 Turbo

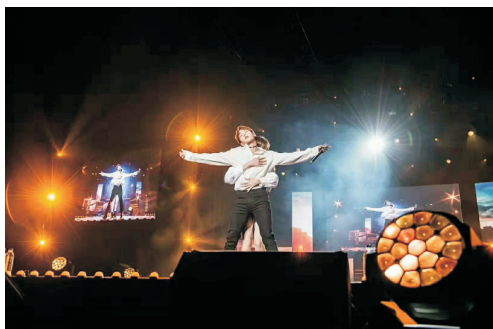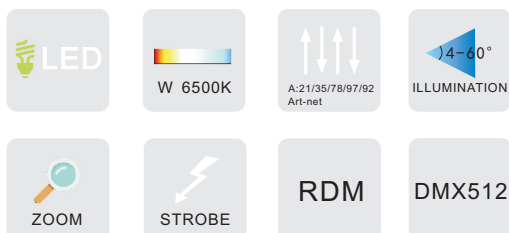





Performance

- Zoom:4°-60°
- Lamp:19*30W LED RGBW
- Color Temperature:6500K
- Power: 100-240V ,50-60Hz, 450W
- Channel: A:21/35/78/92/97 B:21/35
- Internet Control:Art-net
- Colorwheel:RGBW
- Focus:Linear focus
- Strobe:1-25/S
- Dimmer:Linear focus
- Display:2.8"touch screen
- Battery: display with battery inside
- Upgrade: firmware upgrade with DMX cable
- Size:L405.5mm W286.5mm H493.5mm
- Weight:N.W.16.5KGS
- Working Temperature:Max45°

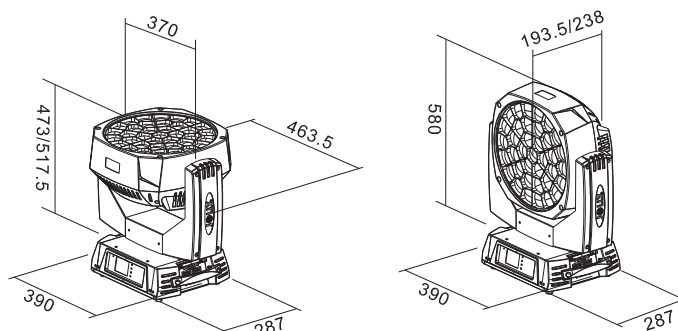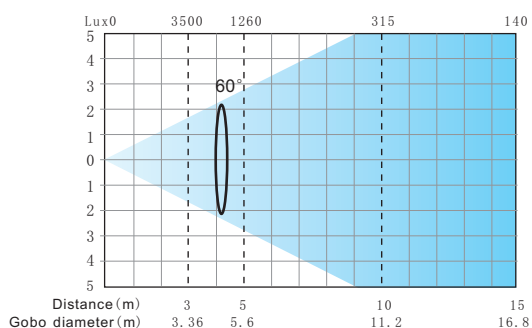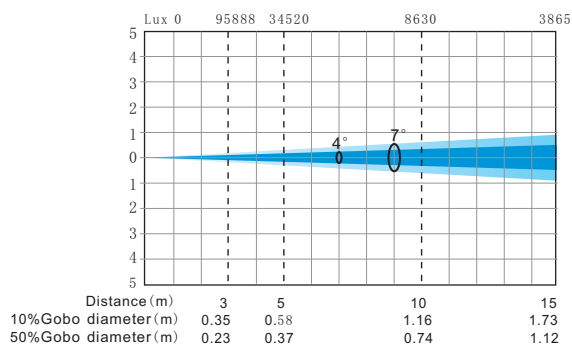









Performance

- Lamp : 19*60W RGBW
- Color temperature : 6500K
- Power : AC:100-240V/50-60Hz 1000W
- Channel : 50/28/34/91/28/48/92/
111/105/124 Art-net
- Pan 540° Tilt 220°
- Color:RGBW
- Zoom: 3.5-50°
- Strobe: 1-25/S
- Dimmer:0-100% linear
- Display: 2.0" touch screen
- RDM : yes
- Upgrade : firmware upgrade with DMX cable
- Size : L435mm W327mm H517.5mm
- Weight : N.W.19kgs
- Noise : 35-55db
- LP66




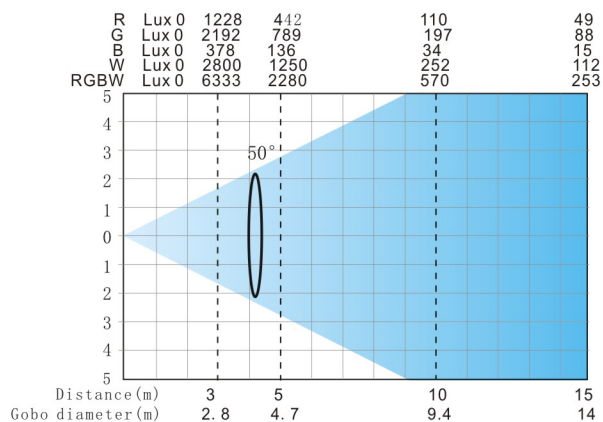
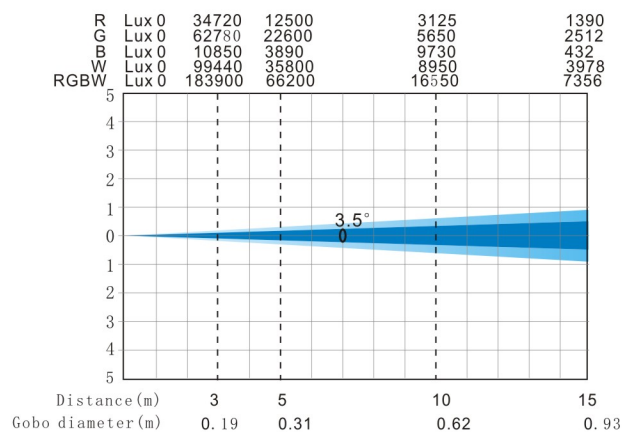
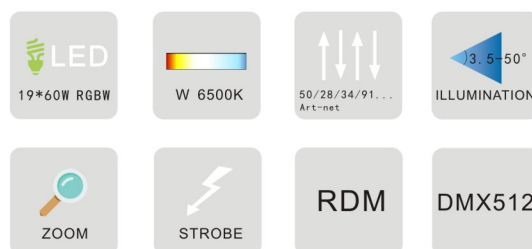
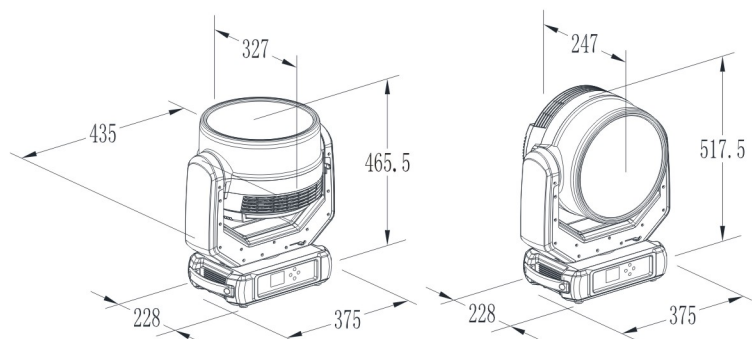


Performance

- Lamp: 12*40W LED, RGBW
- Color temperature : 6500K
- Power: 100-240V, 50/60Hz, 550W
- Channels: 29/21/21/15 channels
- Color: RGBW
- Zoom: 4~60°
- Strobe: 25/s
- Dimmer : linear dimmer
- Pan: 540°/2.5s Tilt 210°/1s
- Display : 2.8" touch screen
- RDM: yes
- Size: L 364mm W 247mm H 503mm
- Weight : N.W.16.5kgs

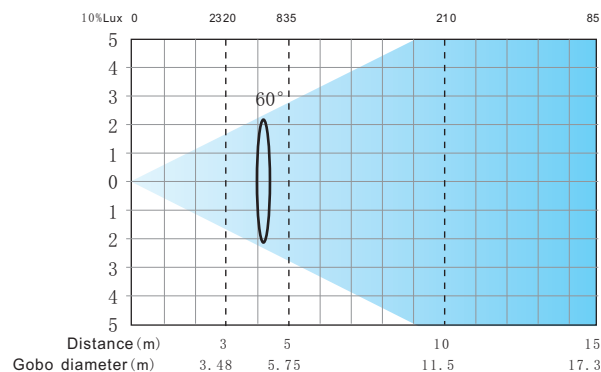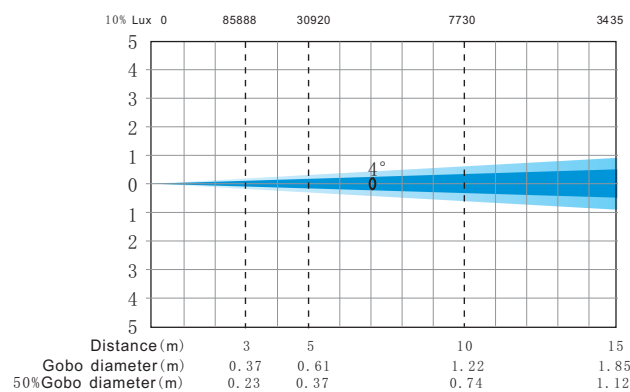
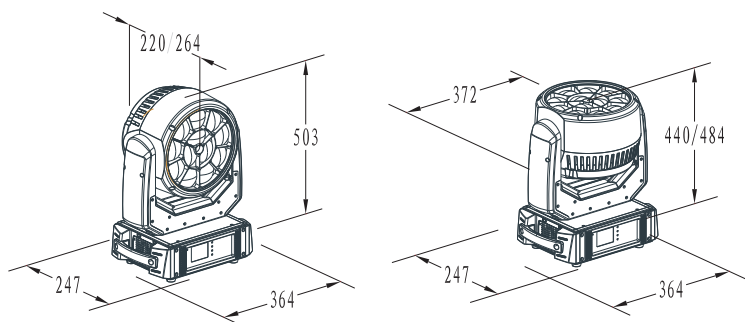


LX-740

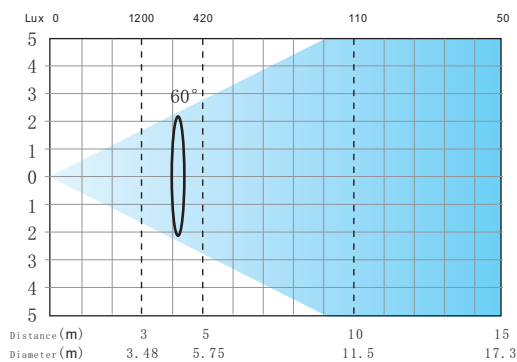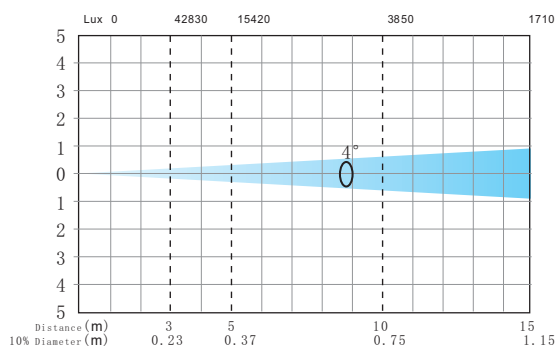

Performance

- Zoom : 4-60°
- Lamp : 7*40W LED RGBW
- Colortemperature : 6500K
- Power : AC:100-240V 50/60Hz 300W
- Channel : 22/16/22
- Nternet Control:Art-net
- Colorwheel:RGBW
- Lens:Rotation lens
- Focus:Linear focus
- Strobe : 1-25/S
- Dimmer : linear dimmer
- Pan/Tilt : Pan 450° 1.2S Tilt 230° 0.7S
- Display : 2.0 Touch screen
- Battery:display with battery inside
- Upgrate:firmware upgrate with DMX cable
- Size : L(mm) : 250 W(mm) : 165 H(mm) : 336
- Weight : N.W(kg) : 5.8
- Working Temperature:Max 45°

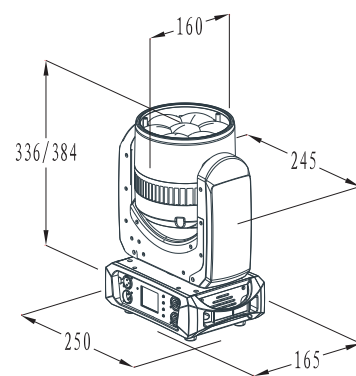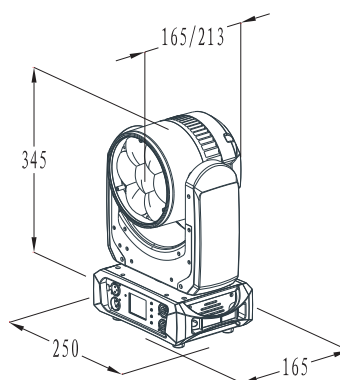


A-14 Coupe









Static gobo




Rotating gobo



Effect wheel





50° (Lux)	3750	937	416	234	148
5° (Lux)	138000	34500	15333	8600	5500

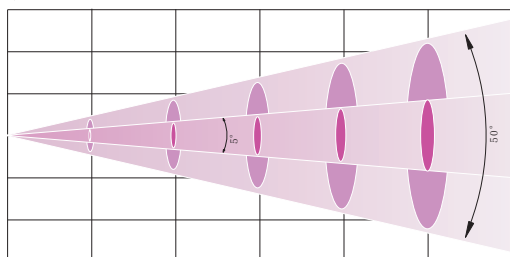

Distance (m)	5	10	15	20	25
5° Gobo diameter (m)	Φ0.45	Φ0.9	Φ1.35	Φ1.8	Φ2.25
50° Gobo diameter (m)	Φ4.7	Φ9.4	Φ14.1	Φ18.8	Φ23.5




Performance

- Lamp : 1400W LED
- Color temperature : 6500K
- Power : AC:100-240V, 50/60Hz, 1700W
- Channel : 54/37/35 channels
- Colorwheel : 5 + open , 6 + open
- CMY : CMY+CTO
- CRI : 70/80/90
- Static gobowheel : 8 gobo + open
- Rotating gobowheel : 6 gobo + open
- Animation : yes
- Blade system : 4 blade individually
- Prism : 4 facet
- Size : OD 32mm ID 24mm
- Frost : linear frost
- Focus : auto focus
- Zoom : 5-50°
- Shutter : 1-25/S
- Dimmer : linear dimmer
- Pan : 540° 5.3S Tilt : 270° 3.0S
- Display : LCD
- Size : L 483mm W 336mm H 871mm
- Weight : N.W. 48kgs G.W. 93kgs

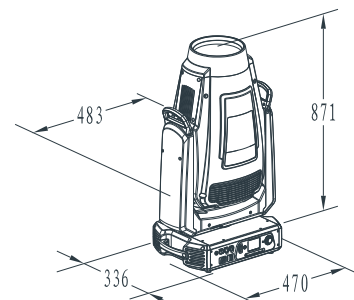


Performance

- Lamp : 800W White LED
- Color temperature : 6500K
- Power : AC:100-240V 50/60Hz 900W
- Channel : 44/35 channels
- Pan/Tilt : pan 540°/ 4.35s Tilt 270°/ 2.6s
- CMY: CMY + CTO
- Colorwheel : 6 color + open
- Blade system : 4 blade individually
- Animation : yes
- Static gobowheel : 9 gobo + open
- Rotating gobowheel : 7 gobo + open
- Prism : 4 facet prism
- CRI : 70 / 80 or 90
- Frost : linear frost
- Focus : auto focus
- Zoom : 5-50°
- Strobe : 1-25/s
- Dimmer : linear dimmer
- Display : 2.8" touch screen
- RDM : yes
- Size : L404mm W247mm H794.5mm
- Weight : N.W.29.5kgs

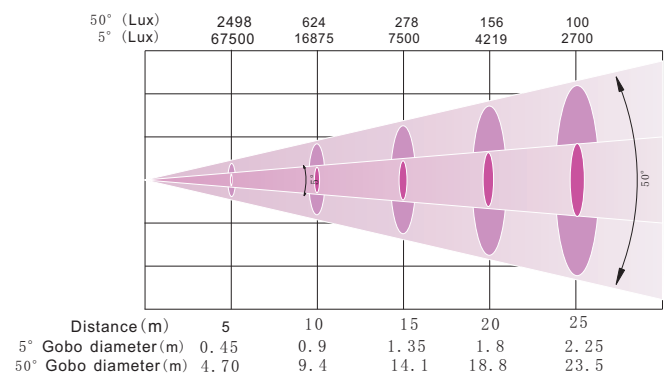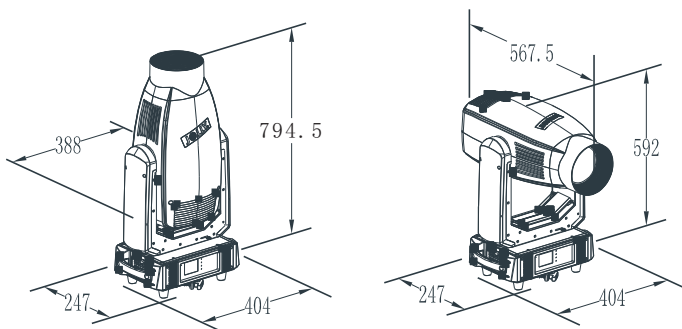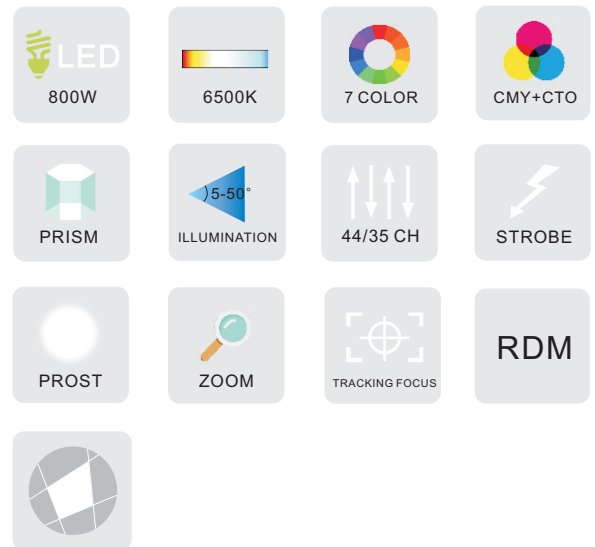

Performance








- Lamp : 400W White LED
- Color temperature : 8000K
- Power : AC:100-240V 50/60Hz 500W
- Channel : 23/18
- Colorwheel : 8 color + open
- Iris : 5-100%
- Static gobowheel : 8 gobo + open
- Roating gobowheel : 7 gobo + open
- Prism : 4 facet
- Frost : linear frost
- Focus : auto focus
- Strobe : 1-25/S
- Dimmer : linear dimmer
- Zoom : 6-40°
- Gobo size : OD 26.9mm ID : 21mm
- Pan/Tilt : Pan 540° 3.5S Tilt 270° 2.0S
- Display : 2.8 touch screen
- Size : L(mm) : 417 W(mm) : 247 H(mm) : 726
- Weight : N.W(kg) : 28 G.W(kg) : 34

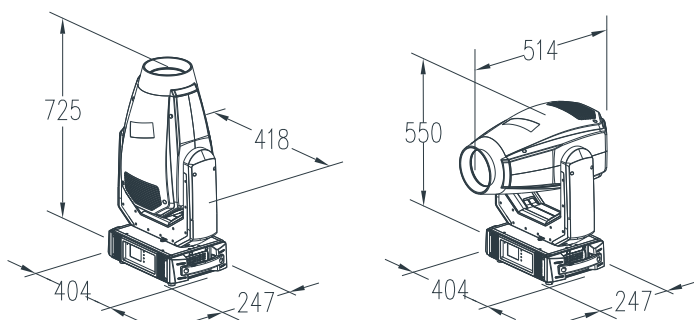

Static gobo








Rotating gobo

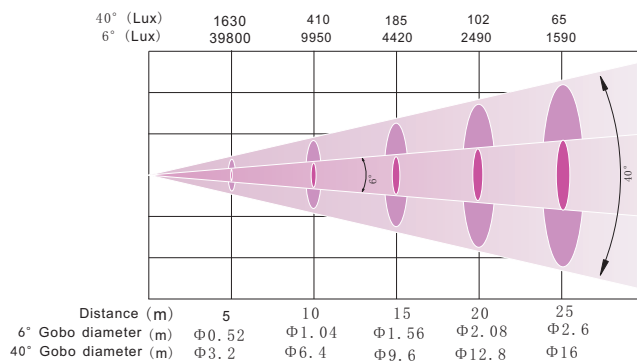

Performance


- Beam Angle : 8°
- Lamp : 36*15W LED RGBW, 144*0.2W LED RGB
- Color Temperature : 6500K
- Power : 100-240V, 50/60Hz, 750W
- Channel : 25/38/46/82/82/146/169 channels
- Internet Control : Art-net
- Pan/Tilt : Pan&Tilt continuously
- Colorwheel : RGBW
- Strobe : 1-25/S
- Dimmer : linear dimmer
- Display : 2.8" touch screen
- Battery : display with battery inside
- Upgrade : firmware upgrade with DMX cable
- Size : L310mm W405mm H537mm
- Weight : N.W.18kgs
- Working Temperature : Max45°C

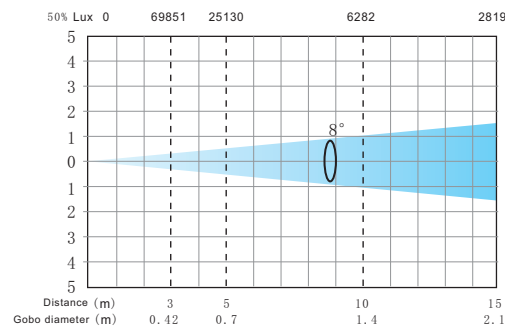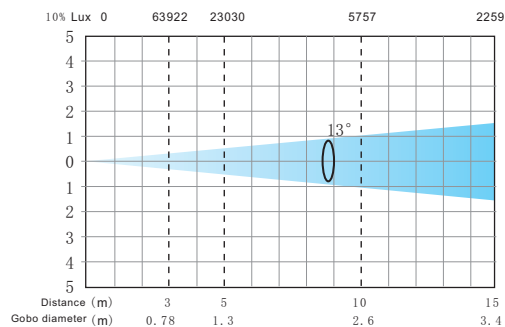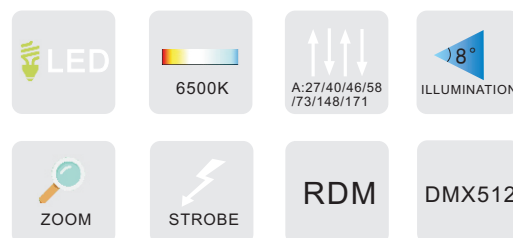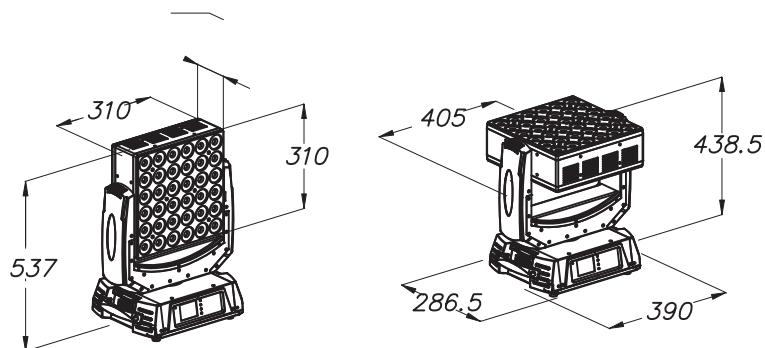

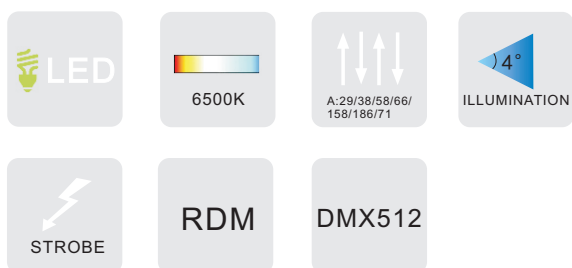




Performance

- Beam Angle : 4°
- Lamp : 5*60W LED RGBW, 1280*0.2W LED RGB
- Color Teamperature : 6500K
- Power : 100-240V, 50/60Hz, 800W
- Channel : 29/38/58/66/158/186/71 channels
- Internet Cntorl : Art-net
- Pan/Tilt : Pan&Tilt continuously
- Colorwheel : RGBW
- Strobe : 1-25/S
- Dimmer : Linear dimmer
- Display : 2.8"youch screen
- Battery : dispaly with battery inside
- Upgrade : firmware upgrate with DMX cable
- Size : L623mm W252mm H381mm
- Weight : N.W.20kgs
- Working Tenperature : Max 45°C





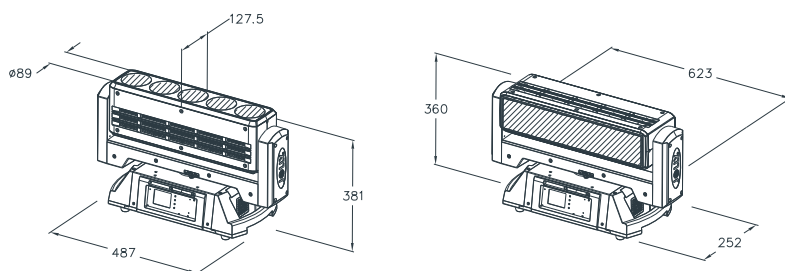


Performance

- Lamp: 2304*0.2W RGB
- Power: 100-240V, 50/60Hz, 600W
- Channel: 17/233/29/12/39/120/444/Art-net
- Internet control: Art-net
- Pan/Tilt: Pan&Tilt continuously
- Color: RGB
- Strobe: 1-25/S
- Dimmer: linear dimmer
- Display: 2.8 touch screen
- Battery: display with battery inside
- Upgrade: firmware upgrade with DMX cable
- Size: L286.5mm W405mm H537mm
- Weight: N.W. 16kgs
- Working Temperature: Max 45°C

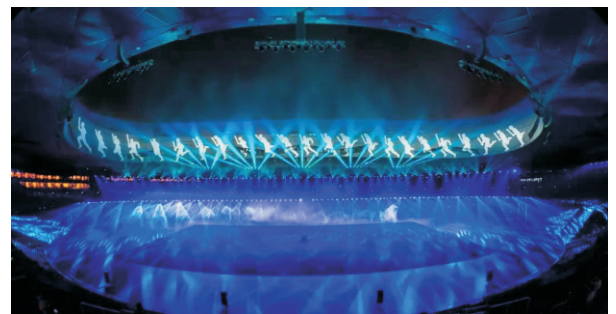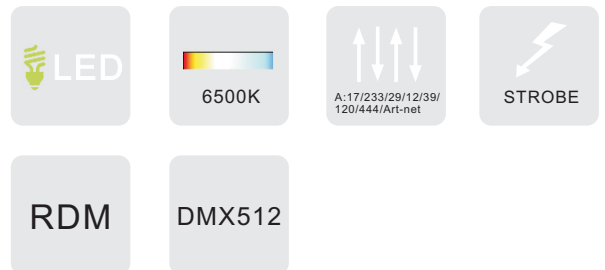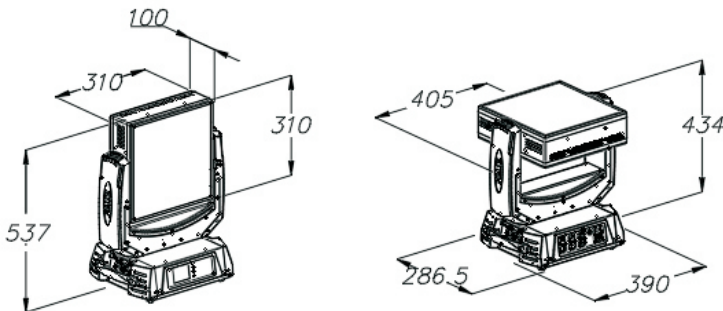


LT-500PS II

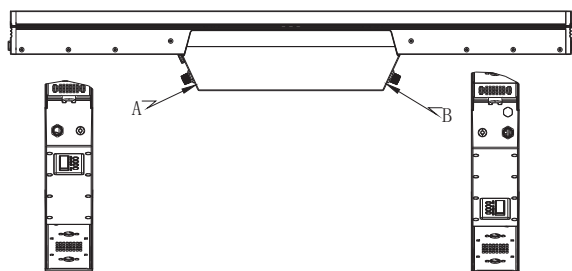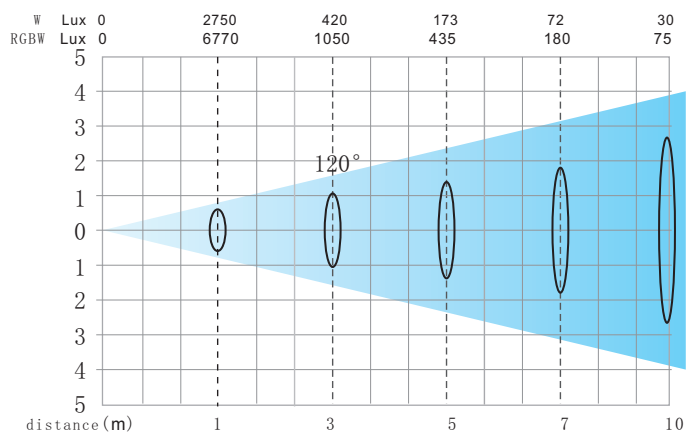








Performance

- Lamp: RGB 672*0.5W W 112*3W
- Color temperature: 8000K
- Power: AC:100-240V 50/60Hz 700W
- Channel: 10/14/16/32/40/48/96CH
- Angle: 120°
- Strobe: 1-25/S
- Dimmer: 0-100% linear
- Frost: electronic frost
- Display: OLED
- Control: DMX512/Art-net/sACN
- RDM: yes
- Upgrade: firmware upgrade with DMX cable
- DMX : 3pin/5pin
- Size: L 1000mm W 160mm H 178mm
- Weight: N. W. 10kgs G. W. 12.8kgs
- Noise: 0-45db
- IP65

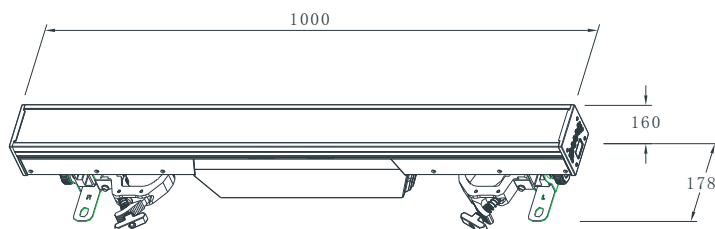




Performace

- Lamp : 240pcs*1W R/G/B/W
- Color temperature : 6500K
- Power : AC:100-240V、 50/60Hz 800W
- Channel : 10/14/19/75/5/61ch
- Angle : 120°
- Strobe : 1-25/S
- Dimmer : 0-100% linear
- Frost : electronic frost
- Display : OLCD
- Control : DMX512
- RDM : yes
- Upgrade : firmware upgrade with DMX cable
- DMX : 3pin/5pin
- Size : L 1000mm W 160mm H 178mm
- Weight : N.W.10kgs G.W. 12.8kgs
- Noise : 0-45db
- IP65

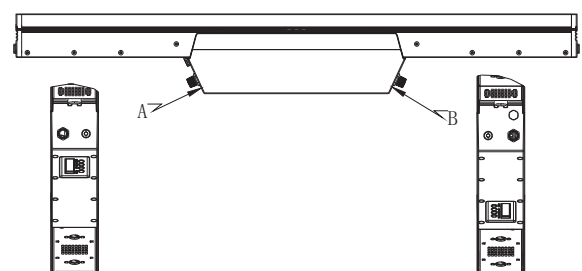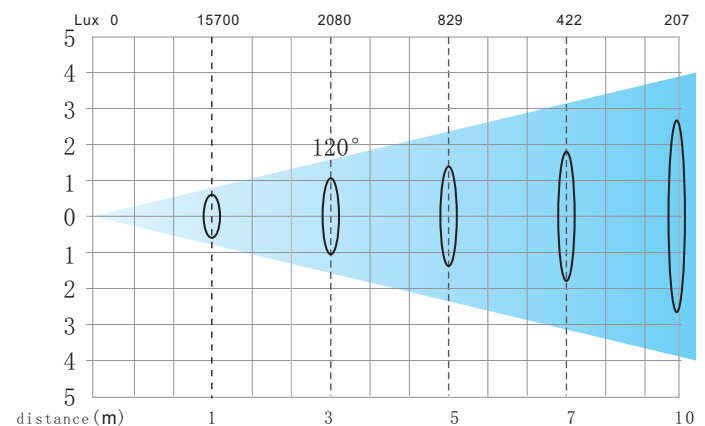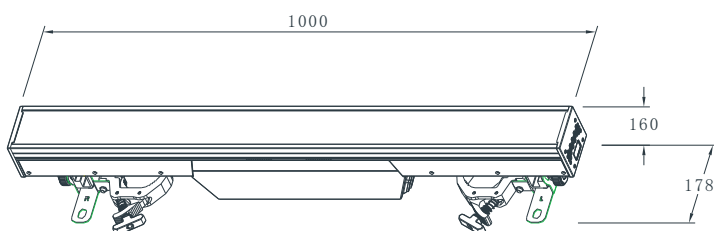




Performance

- Beam Angle : 15°
- Lamp : 37*15W LED, white
6000±250K CRI ≥95
- Power : AC:100-240V 50/60Hz 500W
- Channel : 3/5
- Strobe : 1-25/S
- Dimmer : 0-100%
- Display : LCD
- Size : L 413mm W 235mm H 235mm
- Weight : N.W. 6.8kgs G.W. 12kgs
- Noise : 0-45db

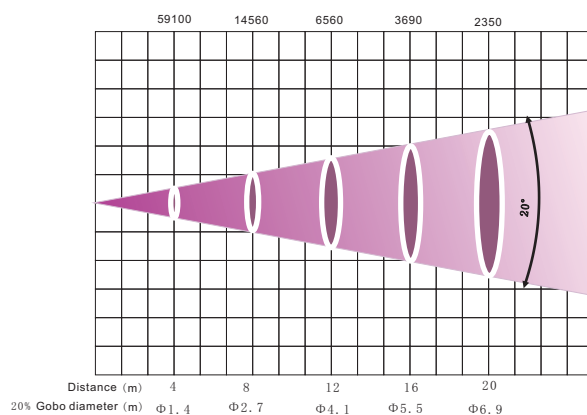
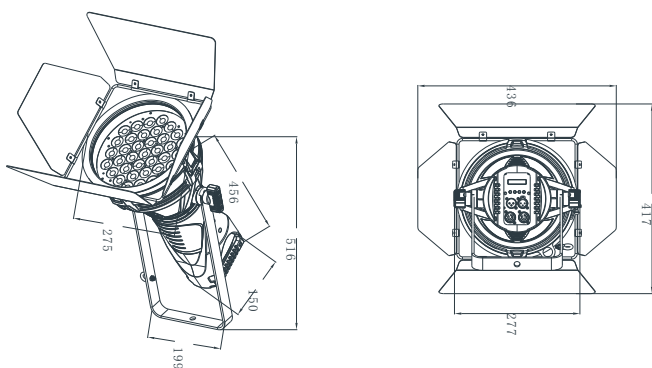
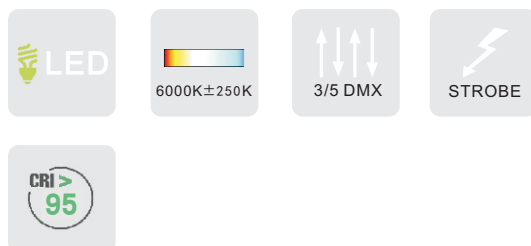


Performance

- Angle : 20°
- Lamp : 31* 10W White LED
- Color temperature : 6300K(standard)
2800K-8000K(optionable)
- Power : AC:100-240V、 50/60Hz、 350W
- Channel : 3/1 channels
- Strobe : 1-12/S
- Dimmer : linear dimmer
- Display : LCD screen
- Size : L 446mm W 273mm H 273mm
- Weight : N.W.6.3 kgs
- Working Temperature:Max 45°C

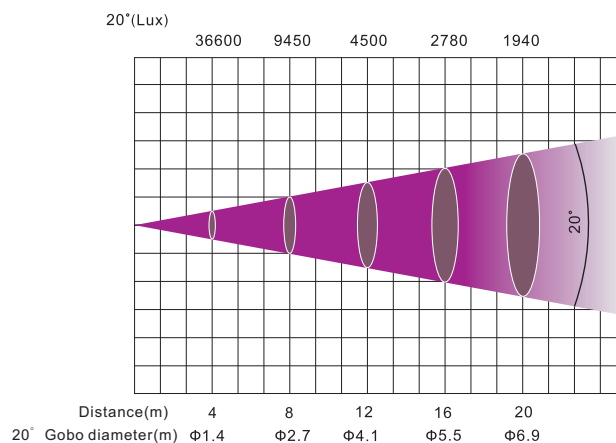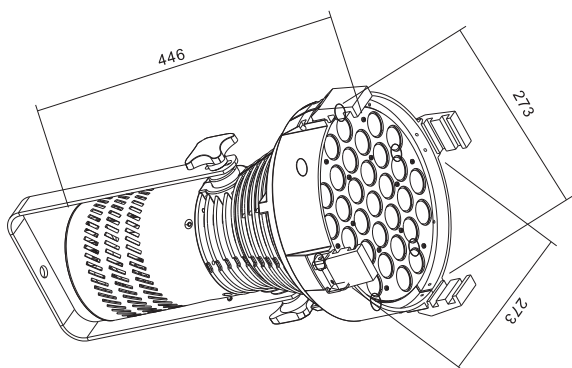


LP-1915

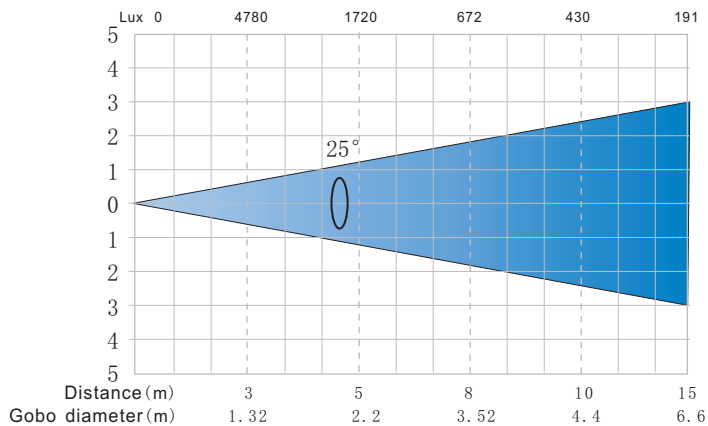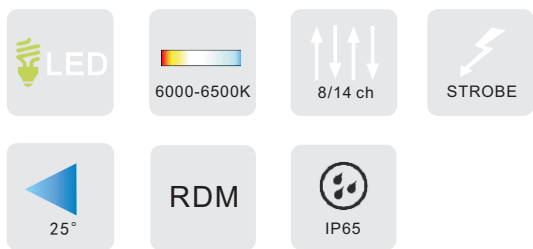



Performance

- Angle:25°
- Lamp:19 pcs LED , RGBW , 15W
- Color temperature : 6000-6500K
- Power:100-240V 50/60Hz 200W
- Channel:8/14ch
- Color:RGBW
- Strobe:1-25/S
- Dimmer:linear dimmer
- Display:LCD
- Size:L295mm W236mm H272mm
- Weight : N.W. 6.2kgs G.W. 8kgs
- Ip65

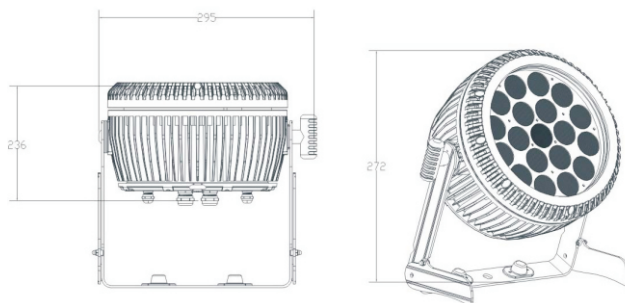


LW-600

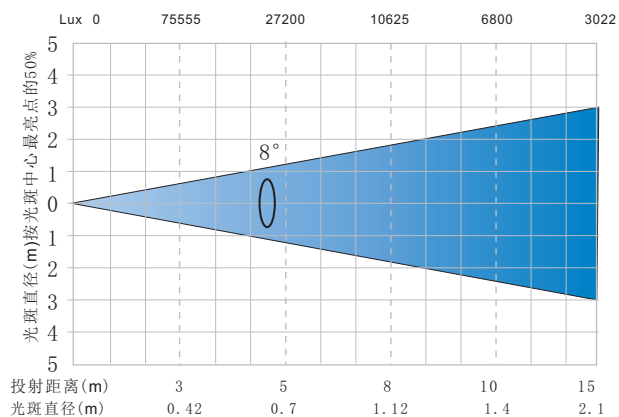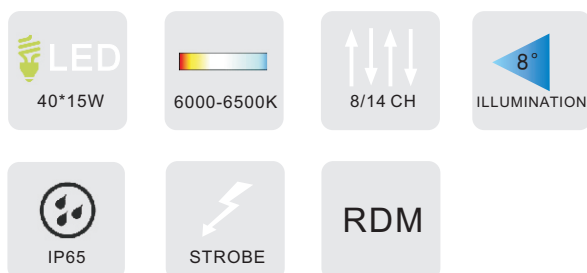







Performance

- Lamp : 40*15W LED RGBW
- Color temperature : 6000-6500K
- Power : AC:100-240V 50/60Hz 600W
- Channel : 8/14 channels
- Angle : 8°
- Strobe : 1-25/S
- Dimmer : linear dimmer
- Display : LCD
- Size : L 646mm W 137mm H 329mm
- Weight : N.W. 15.8kgs G.W. 22kgs
- Ip65

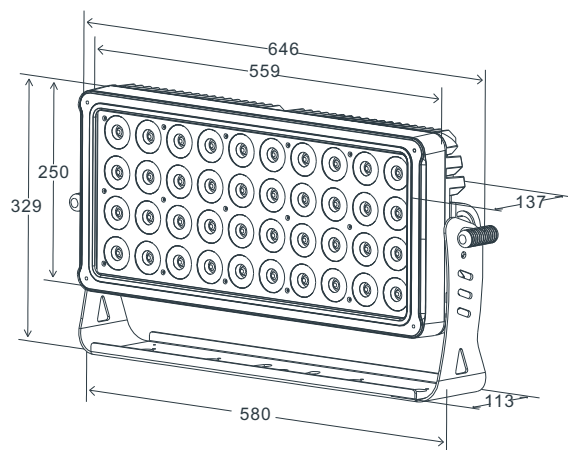

Performance

- Lamp : 48*10W LED RGBW
- Color temperature : 6000-6500K
- Power : AC:100-240V 50/60Hz 500W
- Channel : 8/14 channels
- Angle : 15°/25°/40° optional
- Strobe : 1-25/S
- Dimmer : linear dimmer
- Display : LCD
- Size : L 646mm W 137mm H 329mm
- Weight : N.W. 15.8kgs G.W. 22kgs
- Ip65

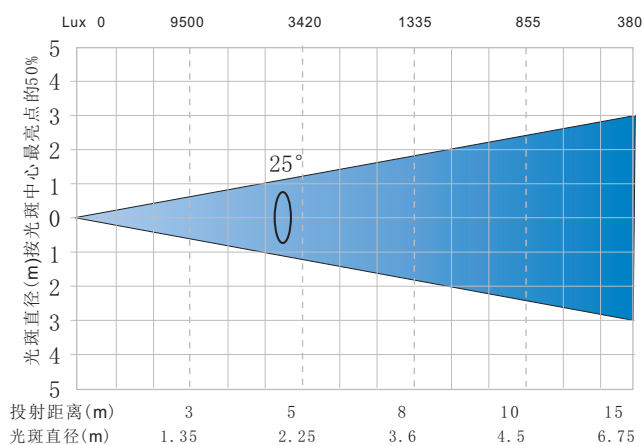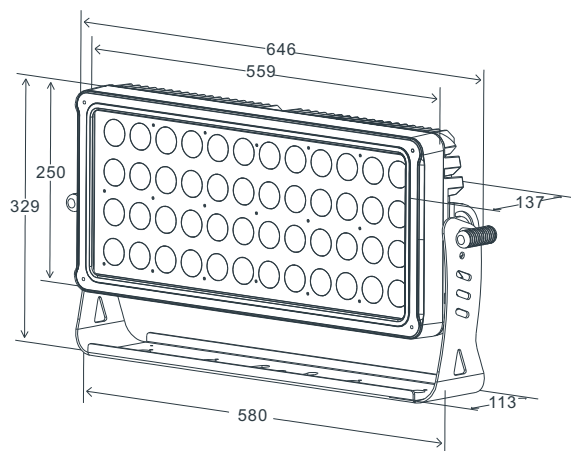



广州鸿彩舞台设备有限公司

地址：广州市番禺区大龙街沙涌村长沙路30号

电话：+86 020 84558833

网址：www.jollylight.com



鸿彩灯光微信公众号



鸿彩灯光官方网站